## Yamato



# High Speed Inspection System

Designed for large packaged products and cartons, the Yamato Xray YX40 is a state of the art, high-speed inspection system.

The versatile system is can inspect a wide range of products and container types, from multipacks of snack foods and dairy products to bulk foods and trays of meat.

Yamato's advanced linear array technology delivers superior performance in identifying contaminants, scanning for missing or broken products, detecting packing voids and confirming fill levels.

This system has been created to easily fit into existing conveyor systems and the quick release belt allows simple dismantling and wash down. Available with a range of reject options including retracting belt conveyors and pneumatic pushers.

### Superior Performance

- Contaminant detection (metal, stone, glass, bone and certain plastics).
- Scanning for mass, missing or broken products.
- Detecting packing voids.
- Isolating reject based on contamination or checkweigh non-conformities.




### **Key Features**


- Custom systems to 614mm wide
- Adaptable ergonomic design
- Inspects wide product
  range including bulk flow
- Hygienic design, up to FSMA standard
- Rates of 100 metres
  a minute
- Easy user interface and controls

#### Yamato Scale Dataweigh (UK) Ltd.

## **Yamato**





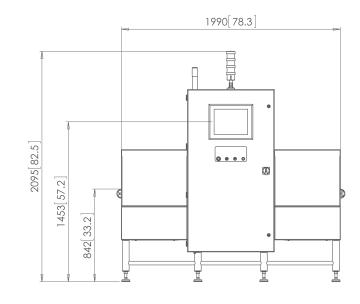

| Xray YX40 Specifications |  |
|--------------------------|--|
| Technology               | Computer-controlled dual line linear array                   |
| X-Ray Generator          | Various specifications from 80kV to 120kV                    |
| Conveyor Speed           | 0–100 m/min computer controlled                              |
| Detector Array Length    | 409 – 614 mm   |
| Maximum Line Rate        | 2000 lines per second  |
| Resolution               | 4096 grey levels per pixel                                   |
| Video Display            | 15" colour touchscreen with real-time images and diagnostics |
| Calibration              | Self-Calibrating during normal operation                     |
| Detection Limit          | 0.8 mm stainless steel typically, dependent on product       |
| Inspection Rate          | Up to 600 packs/minute                                       |
| Power Requirements       | 110 VAC or 200-240 VAC at 1000VA                             |
| Dimensions (LxWxH)       | 2070 x 1250 x 1755 mm or 2670 x 1250 x 1755 mm               |

## Yamato - on the cutting edge

Yamato Scale has established itself as a global leader in the weighing equipment and systems industry supplying the food, chemical and heavy goods industries. On the cutting edge of multihead weighing technology. We work in partnership with our clients to offer tailored solutions, which meet their specific needs.



#### Yamato Scale Dataweigh (UK) Ltd.

Unit 6B, Millennium Way, Leeds, West Yorkshire LS11 5AL T: 0113 322 1546 F: 0113 350 2020 E: sales@yamatoscale.co.uk